




NOTICE TO CONTRACTORS WATER METER SPACING FOR RESIDENTIAL HOMES (3/4" METER)

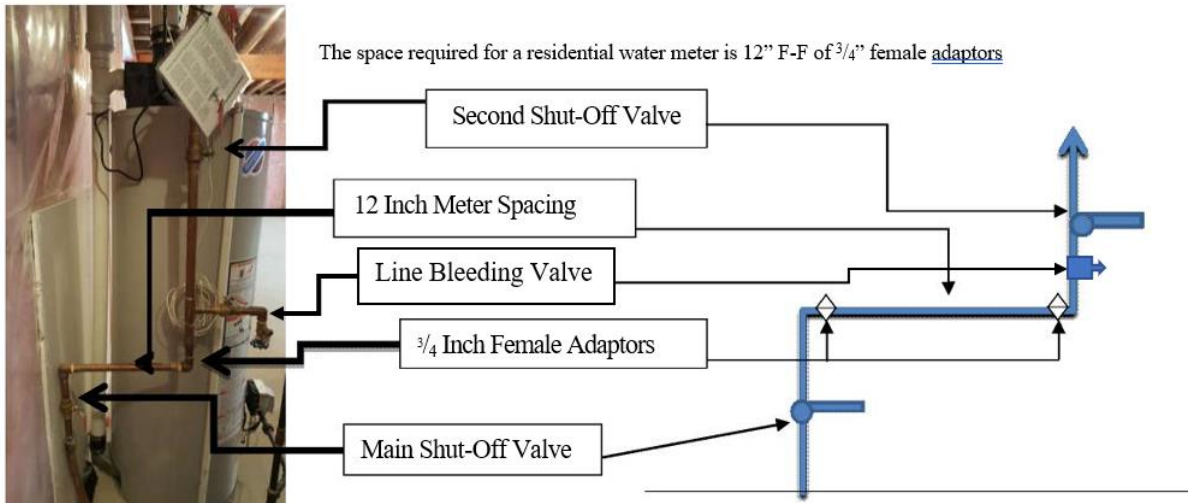

Remote Read Provisions:


A 22-gauge FT4-4 conductor wire must be run to the outside of the house. The location of the wire is to be near the front corner of the driveway side of the building about 1 foot (12 inches) in from the corner and 4-5 feet (48-60 inches) above final grade. **Telephone wire is not acceptable.** Inside, the wire **MUST BE** terminated and visible close to the water meter location.

CC Valves:

You must ensure these valves are protected during construction. This is **YOUR** responsibility. The repair of damaged tops will be at the contractors expense. The valve box extension **MUST BE** set to final grade before concrete is poured or landscaping takes place.

Note: Homeowners, please ensure that your contractor is aware of the specifications set by the Town of Stony Plain. Failure to comply will result in fees and charges billed to the homeowners/builders or general contractors. There will be **NO** exceptions to these construction practices. Should the Town be required to make a second call to the home, business charges will apply in the amount of \$61.75.

NOTE: For all commercial or industrial installs see standards & guidelines figures on the Town website.
<https://www.stonyplain.com/en/live/water-meters.aspx>

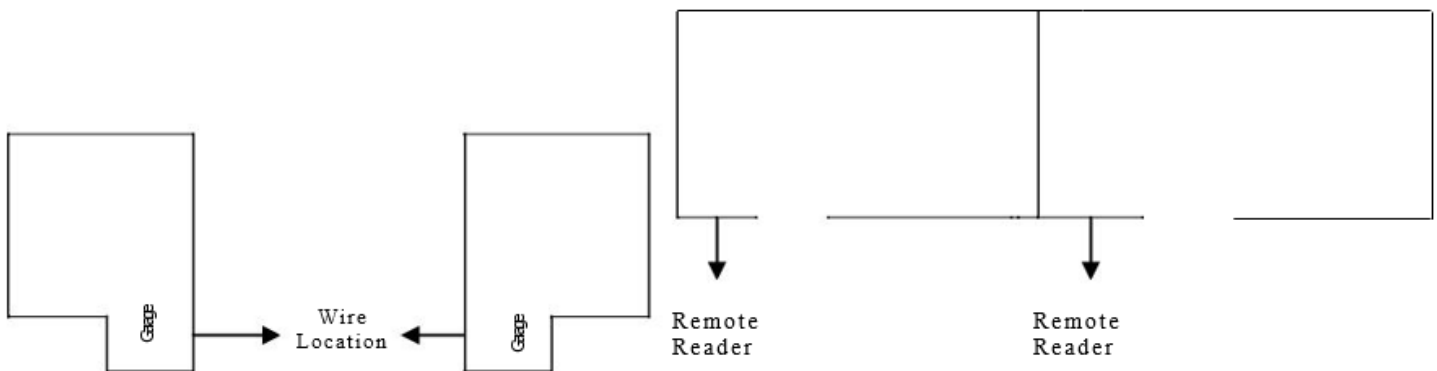

**** For all condominiums, the wire for the remote reader MUST BE located on the front of the units/home. ****